


CCS-CW

To drive Single-Mode butterfly laser diodes in CW regime

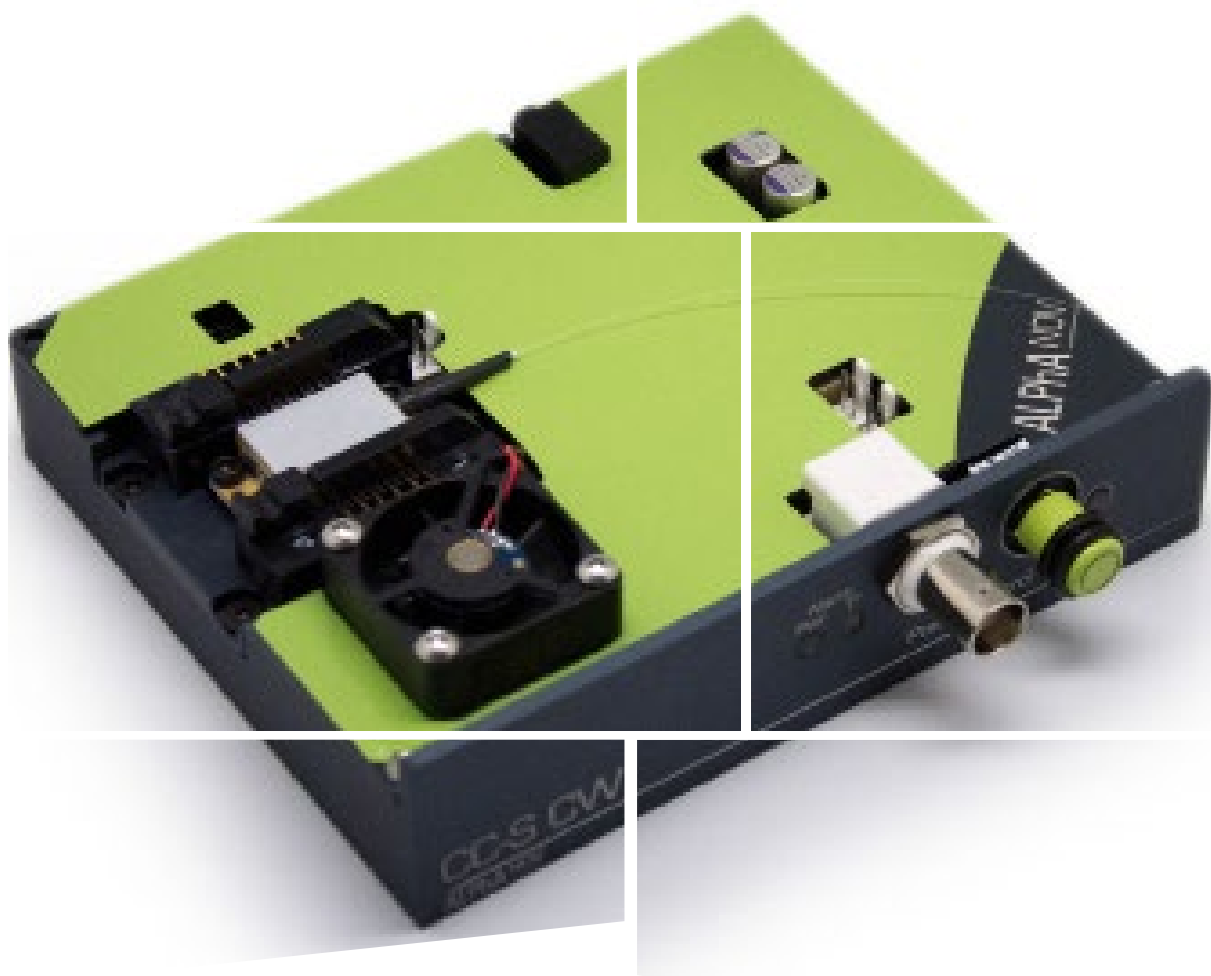


ALPhA NOV

Optics & Lasers Technology Center


CW laser diode drivers

3 versions : Standard, HP & Ultra-low-noise

Current source + TEC controller + Pre-configured mounting sockets (various form factors including butterfly) + USB interface + GUI + Several Libraries (Labview/Hexa/Python/DLLs etc.)

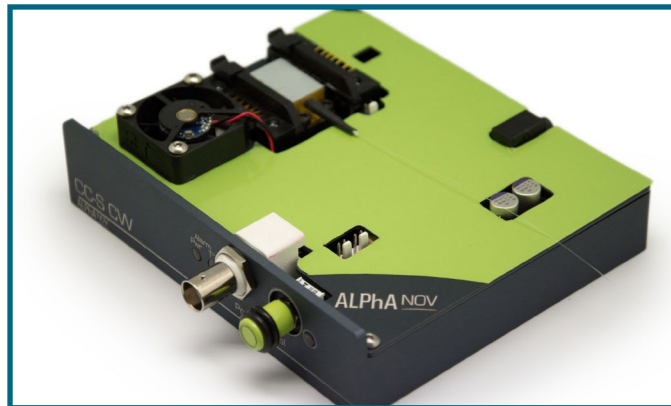


These fully integrated laser diode control and mounting modules are designed for precision control of single mode laser diode modules in research labs and for product integration. An ultra-low noise version is offered as a new precision solution with new performances.

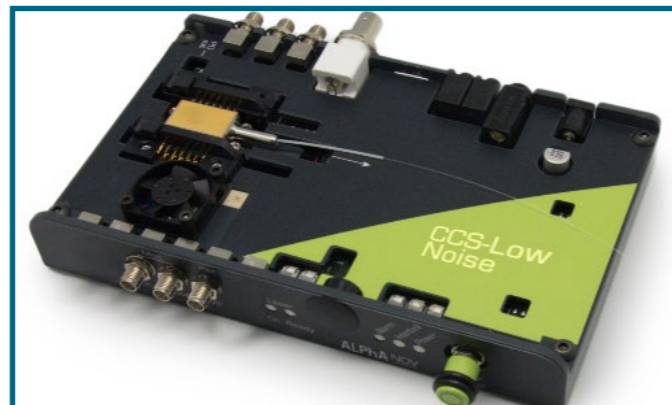

Multiple layers of laser diode protection ensure that your device is protected at all times. The drivers can be delivered with or without Butterfly mounting sockets. They are compatible with many other laser diode form-factors (TO, TOSA, VCSEL etc.)

Features

- Output current up to 800, 1500 and 2500mA (three versions)
- Adjustable compliance voltage : 0-18V range [see spec]
- Internal modulation over a CW setpoint with sin/sqr/triang adjustable modulation (1 version)
- External modulation over a CW setpoint with adjustable transfer function 0-20mA/V (1 version)
- Temperature stability : down to 1mK
- Available as electronics boards for cost saving OEM solution
- See RIN noise curve for impressive performances of low noise version
- USB, manual & analog (0-5 V) signal peak power adjustment
- Several Libraries for system integration : Labview, DLLs, Hexa, Python
- Smart control (USB interface to drive simultaneously several modules from ALPhANOV's laser electronics series)

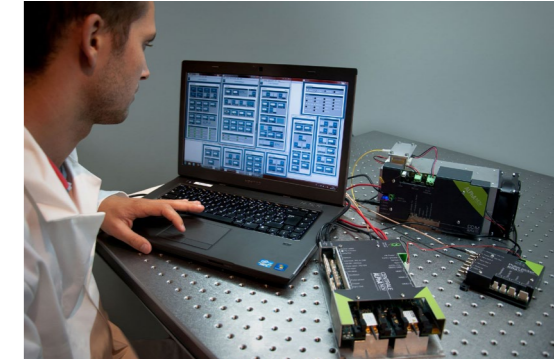


Technical Specifications :

Product Version	CCS-CW		CCS-Low Noise
	Standard	HP (High power)	
Output Current	0-800 mA	0-1500 mA	0-2500 mA
Set point resolution (@ 100 mA)	25 μ A		
Current Modulation	External : 0-5V ; Modulation bandwidth : 100 Hz		Internal : sin/sqr/triang External : 0-20mA/V (adjustable); Mod. bandwidth : 500kHz
Output compliance voltage	0-4.8 V	0-10 V	0-18 V
Laser diode T° regulation	15 - 50°C		0 - 90°C
Temperature stability (typ)	<10 mK		<1 mK
TEC current/voltage	\pm 1.5 A/3.8 V		\pm 3 A/4.6 V
BFM (Back Facet Monitor) / External photodiode monitoring	BFM output connector only		Yes/Yes (variable gain)
Interface/Compatibility/Libraries	USB / Win 7-10 / Hexa, DLLs, LabVIEW, Python		



Also available at board level for OEM integration

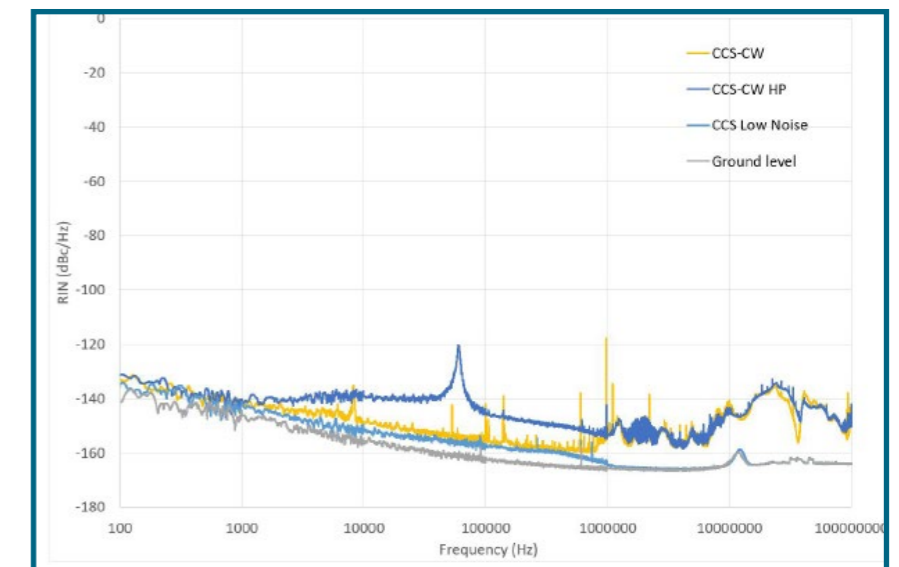

Ultra-low noise RIN performances of CCS-Low noise close to ground level with no noise peak

ALPhA NOV

Optics & Lasers Technology Center

Institut d'optique d'Aquitaine

Rue François Mitterrand

33400 Talence - France

Ph. +33 (0)5 24 54 52 00

www.alphanov.com