

# ALPhA <sup>NOV</sup>

Optics & Lasers Technology Center



## PDM LASERS PULSE-ON-DEMAND MODULES



# MAIN FEATURES OF PDM LASERS

The PDM series consists of single-mode laser modules which generate optical pulses from input TTL/LVTTL digital signal. From single-shot to continuous wave (CW), with pulse length from 1.5ns to any required pulse-burst configuration, the PDM series offer the best temporal flexibility and spatial precision on the laser market.

# WHY PDM+ LASERS ARE ADAPTED FOR MY APPLICATION?

- I need the smallest spot as possible to affect the smallest part of my chip and understand which part of my chip I'm perturbing.

Our PDM+ lasers are single-mode lasers. The output fiber core size is 6µm and through our microscope, you can focus it down to less than 1µm. The full power delivered by the laser is focused on this circular spot size!

- I need temporal precision and temporal agility to synchronize the laser pulse with my chip


The jitter of every PDM+ is less than 8ps. You can synchronize the PDM+ with your chip and know at +/- 8ps when your laser pulse is arriving on your sample. You can choose any pulse from 1.5ns to CW (continuous wave) and from single-shot to 250MHz.

- The silicon of my chip is thick and I need high power


With the large range of PDM+ lasers, you can choose the adapted peak power for your application, up to 10W. Typical required power is ~1W on the back side. At 2W singlemode laser power level, you can easily affect your chip even through a high thickness of silicon.

- What about reliability and product support?

PDM+ lasers are all fiber design lasers. There is no risk of optical misalignment or losses. The module is electronically secured and cannot be damaged by a mishandling. For any support or assistance, our dedicated engineers answer your questions.

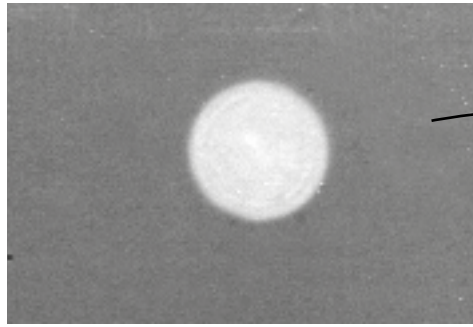

Typical multimode spot size

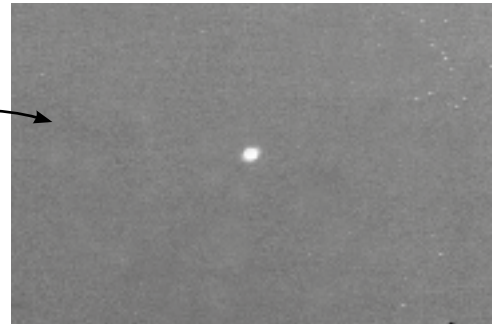

Typical single-mode spot size





FOR ULTRA  
SHORT  
PULSES


# PDM HPP

High pulse performance


This new *High Pulse Performance* (HPP) version, four times faster than the previous PDM+, allows to reach nanosecond or even sub-nanosecond pulses with high peak power. This pulse-on-demand module is ideal for laser fault injection on high frequency IC components if short pulses are required.

Product	PDM - HPP		
Wavelength	808 nm	980 nm	1064 nm
Version	HPP	HPP	HPP
Application	Front side LFI	Back side LFI	Back side LFI
Peak power	500 mW	2 W	1.8 W
Pulse duration	from 1ns to CW		
Repetition rate	From single-shot to 250 MHz		
Beam quality	Single-mode		
Jitter	<8 ps		
Output fiber	Single-mode output fiber		
Minimum spot size	Accessible spot size of 1 μm		

## PDM HPP - High pulse performances

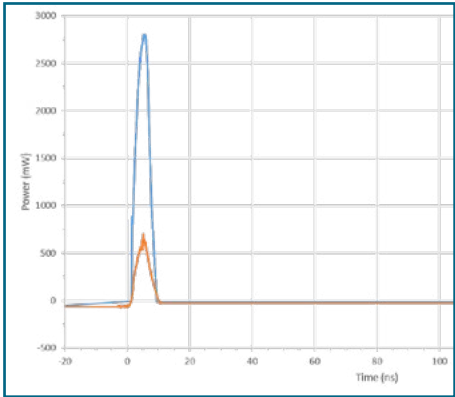


Typical 5ns optical pulse at 980nm vs peak power: PDM HPP in blue ; standard PDM+ in orange

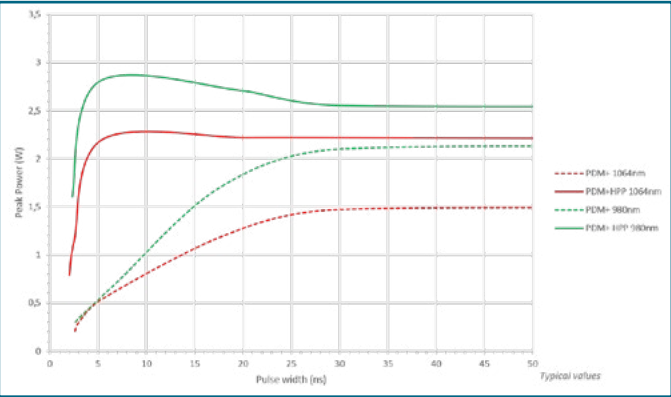

Rise time of the PDM-HPP four times faster of the PDM-HPP (solid lines - green at 980 and red at 1064nm) and standard PDM+ (dotted lines)



- Key features
- Min. pulse duration: 1ns (FWHM)
  - Single-shot, burst mode or CW operation
  - Up to 2 W peak power
  - Extremely low jitter (<8 ps)
  - Up to 250 MHz repetition rate
  - Pulse delay generator included
  - Python compatible

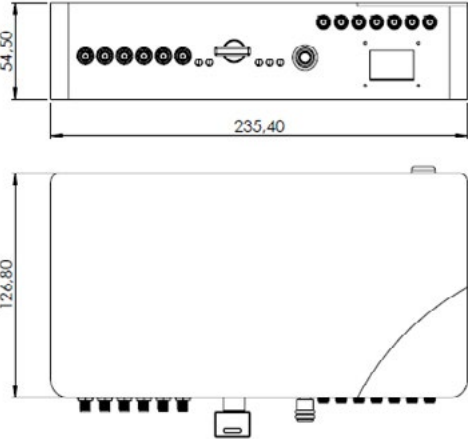




The PDM+ version can generate up to **3.2W** peak power. They are available at 808nm, 980nm, 1064nm and 1420nm. This single-mode laser can be focused down to 1µm with an ALPhANOV's microscope.


## PDM+ & PDM+ HP

## PDM+ & PDM+ HP

Product	PDM+ & PDM+ HP					
Wavelength	808 nm	980 nm		1064 nm		1420 nm
Version	Standard	Standard	HP	Standard	HP	Standard
Application	Front Side LFI	Backside LFI		Backside LFI		Laser Thermal Stimulation
Peak power	500 mW	2 W	3.2 W	1.8 W	2.8 W	1.2W
Pulse duration	from 1.5 ns to CW	from 1.5 ns to CW	from 5 ns to CW	from 1.5 ns to CW	from 5 ns to CW	from 1.5 ns to CW
Repetition rate	From single-shot to 250 MHz					
Beam quality	Single-mode					
Jitter	<8 ps					
Output fiber	Single-mode output fiber					
Minimum spot size	Accessible spot size of 1 µm					

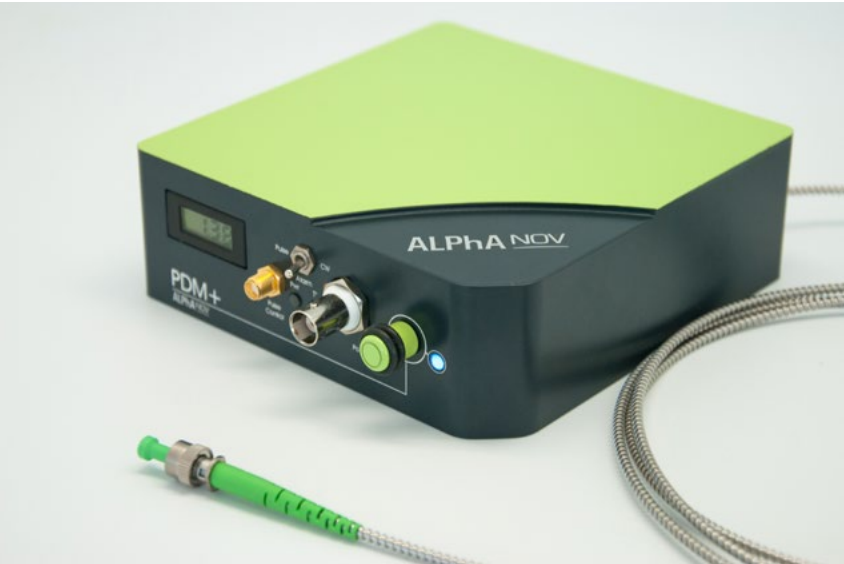

- Key features
- Min. pulse duration: 1.5 ns (FWHM)
  - Single-shot, burst mode or CW operation
  - Up to 3.2 W peak power
  - Extremely low jitter (<8 ps)
  - Up to 250 MHz repetition rate
  - Python compatible

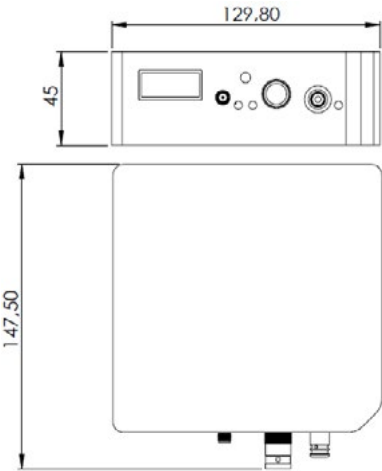





# PDM 2+ & PDM 2+ HP

The PDM2+ version combines two PDM+ modules into the same single-mode output fiber. The properties of the beam (spot size, beam quality, pulse duration, jitter) are exactly the same as a PDM+ laser but with higher peak power.


## PDM 2+ & PDM 2+ HP

Product	PDM 2+ & PDM 2+ HP					
Wavelength (nm)	980/980		1064/1064		980/1064	
Version	Standard	HP	Standard	HP	Standard	HP
Application	Backside LFI		Backside LFI		Backside LFI	
Peak power	4 W	5 W	3 W	4.5 W	3.5 W	4.8 W
Pulse duration	from 1.5 ns to CW	from 5 ns to CW	from 1.5 ns to CW	from 5 ns to CW	from 1.5 ns to CW	from 5 ns to CW
Repetition rate	From single-shot to 250 MHz					
Beam quality	Single-mode					
Jitter	<8 ps					
Output fiber	Single-mode output fiber					
Minimum spot size	Accessible spot size of 1 µm					



### Key features

- Min. pulse duration: 1.5 ns (FWHM)
- Single-shot, burst mode or CW operation
- **Up to 5 W peak power**
- Extremely low jitter (<8 ps)
- Up to 250 MHz repetition rate
- Python compatible

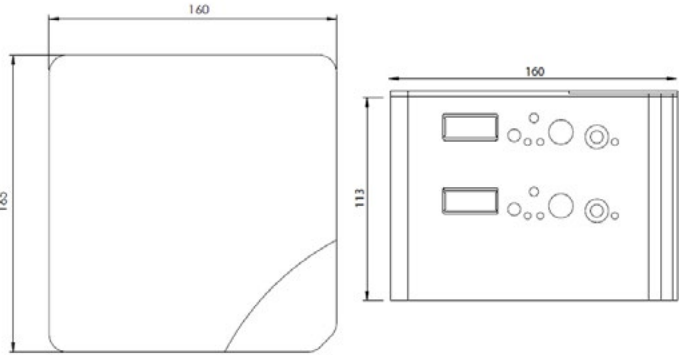



# PDM 2X2 & PDM 4+

The PDM4+ combine 4 PDM+ into one single-mode output fiber. The beam features are the same than PDM+ or PDM2+ but the peak power can be driven up to **6W** in the standard version and to **more than 10W** in the HP version. The PDM+ 2X2 combine two PDM+ into a first single-mode output fiber and two PDM+ into a second output fiber.


## PDM 2X2+ & PDM 4+ ■

Product	PDM2x2+ & PDM2x2+ HP					
Wavelength [nm]	980/980		1064/1064		980/1064	
Version	Standard	HP	Standard	HP	Standard	HP
Application	Backside LFI		Backside LFI		Backside LFI	
Peak power	2x 4 W	2x 5 W	2x3 W	2x 4.5 W	2x 3.5 W	2x 4.8 W
Pulse duration	from 1.5 ns to CW	from 5ns to CW	from 1.5 ns to CW	from 5 ns to CW	from 1.5 ns to CW	from 5 ns to CW
Repetition rate	From single-shot to 250 MHz					
Beam quality	Single-mode					
Jitter	<8 ps					
Output fiber	Single-mode output fiber					
Minimum spot size	Accessible spot size of 1 µm					

PDM4+ & PDM4+ HP	
980/1064	
Standard	HP
Backside LFI	
6 W	10 W
from 1.5 ns to CW	from 5 ns to CW
From single-shot to 250MHz	
Single-mode	
<8 ps	
Single-mode output fiber	
Accessible spot size of 1 µm	




- Key features
- Min. pulse duration: 1.5 ns (FWHM)
  - Single-shot, burst mode or CW operation
  - **Up to 10 W peak power**
  - Extremely low jitter (<8 ps)
  - Up to 250 MHz repetition rate
  - Python compatible

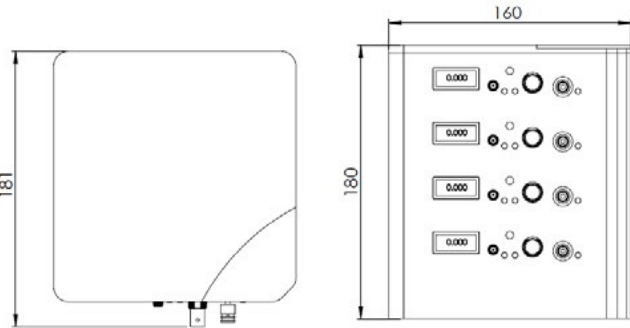



## DRIVE YOUR LASER BY SOFTWARE/DLL OR ANALOG SIGNAL

All PDM+ version can be driven and controlled by computer (USB interface) with ALPhANOV's software or provided DLLs or by analog signal:



**Configure Maximum Levels First**

4,500 A  
Max Peak Current

Adapt the max current in order to increase the power resolution

**Control**

On Off  
Laser Activation

Int Ext Pulse CW  
Current Source Control Mode

Int / Int Ext / Int Ext / Ext  
Trigger/Pulse Dur. Adj.

Choose how to generate the pulses:

- Internal pulse generator
- External trigger and internal pulse duration adjustment
- External trigger which determine also the pulse duration

Control the peak power by computer or by analog signal

**Pulse Settings**

0 mA  
Peak Current

100,000 ns  
Pulse width

100,000 kHz  
Frequency

Control the peak power

You can control internally the pulse duration

If you don't use a trigger, you can choose a frequency

**DC Parameters**

805,0 mA  
DC Current

25,0 °C  
Diode Temp. Temperature

Add a CW offset


Switch easily from Pulse mode to CW mode

Use a TTL/LVTTL signal as a trigger

If you don't use the computer to control the peak power you can use a 0-5V analog signal or the nob


The PDM+ lasers are compatible with ALPhANOV laser benches for IC security testing:

### S-LMS - Single Laser Microscope Station for laser fault injection

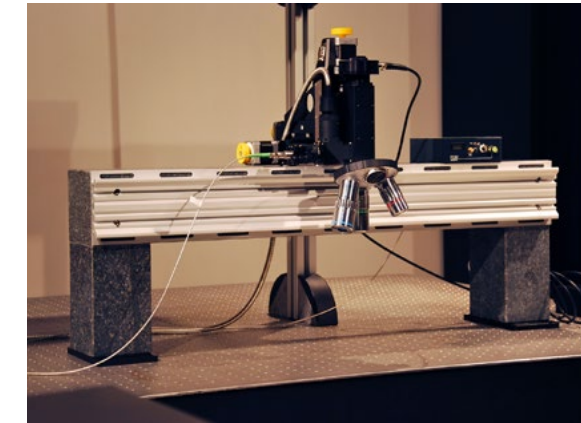


The S-LMS microscope station for laser fault injection is a high-precision platform for security evaluation of integrated circuits. It allows to focus the laser spot on the chip and scan the sample through the back side in order to evaluate the security levels of the electronic components.

### D-LMS - Double Laser Microscope Station for dual laser fault injection

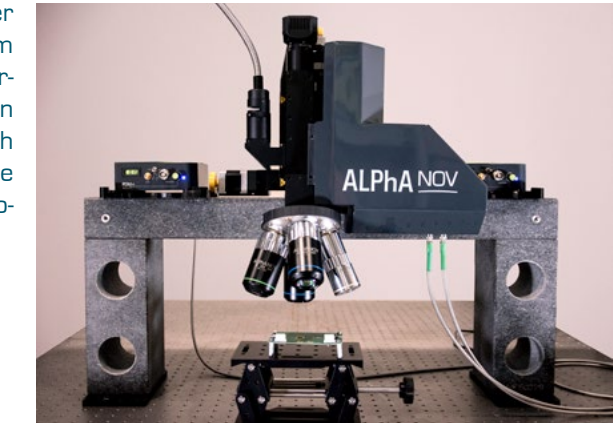


The D-LMS microscope station for double laser fault injection is a platform enable to focus and scan independently two laser spots for security evaluation of integrated circuits. Ideal for double spot injection processes, it offers all the spatial and temporal flexibility to analyze circuits through the back side.

### Photoemission bench

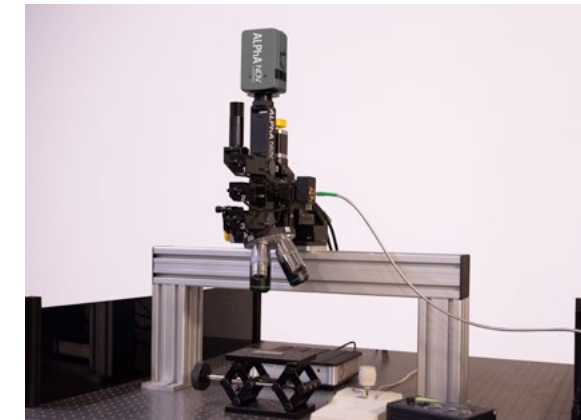


When an integrated circuit is in operation, the zones requested by the routine naturally emit infrared photons through the back side. ALPhANOV's photoemission optical bench allows to capture and visualize these photonic emissions in order to obtain an accurate view of the circuit activities.

### TLS - Thermal Laser Stimulation bench

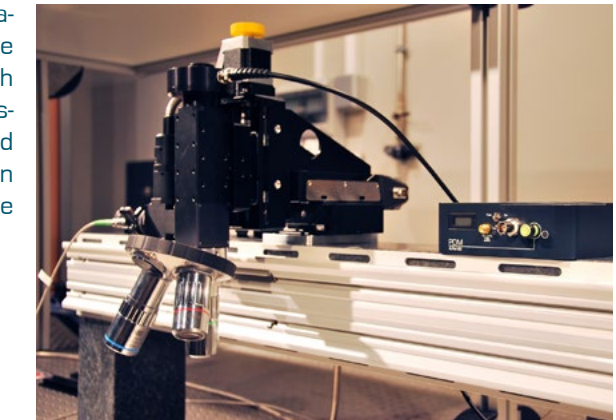

The thermal laser stimulation bench is an optical microscope which enables to focus with precision, a PDM+ laser source (Pulse-on-Demand Module) at 1420 nm. Used through the back side of electronic components, the laser beam warms the sample locally and allows to extract and read out data in a memory according to the current consumption of the transistors.

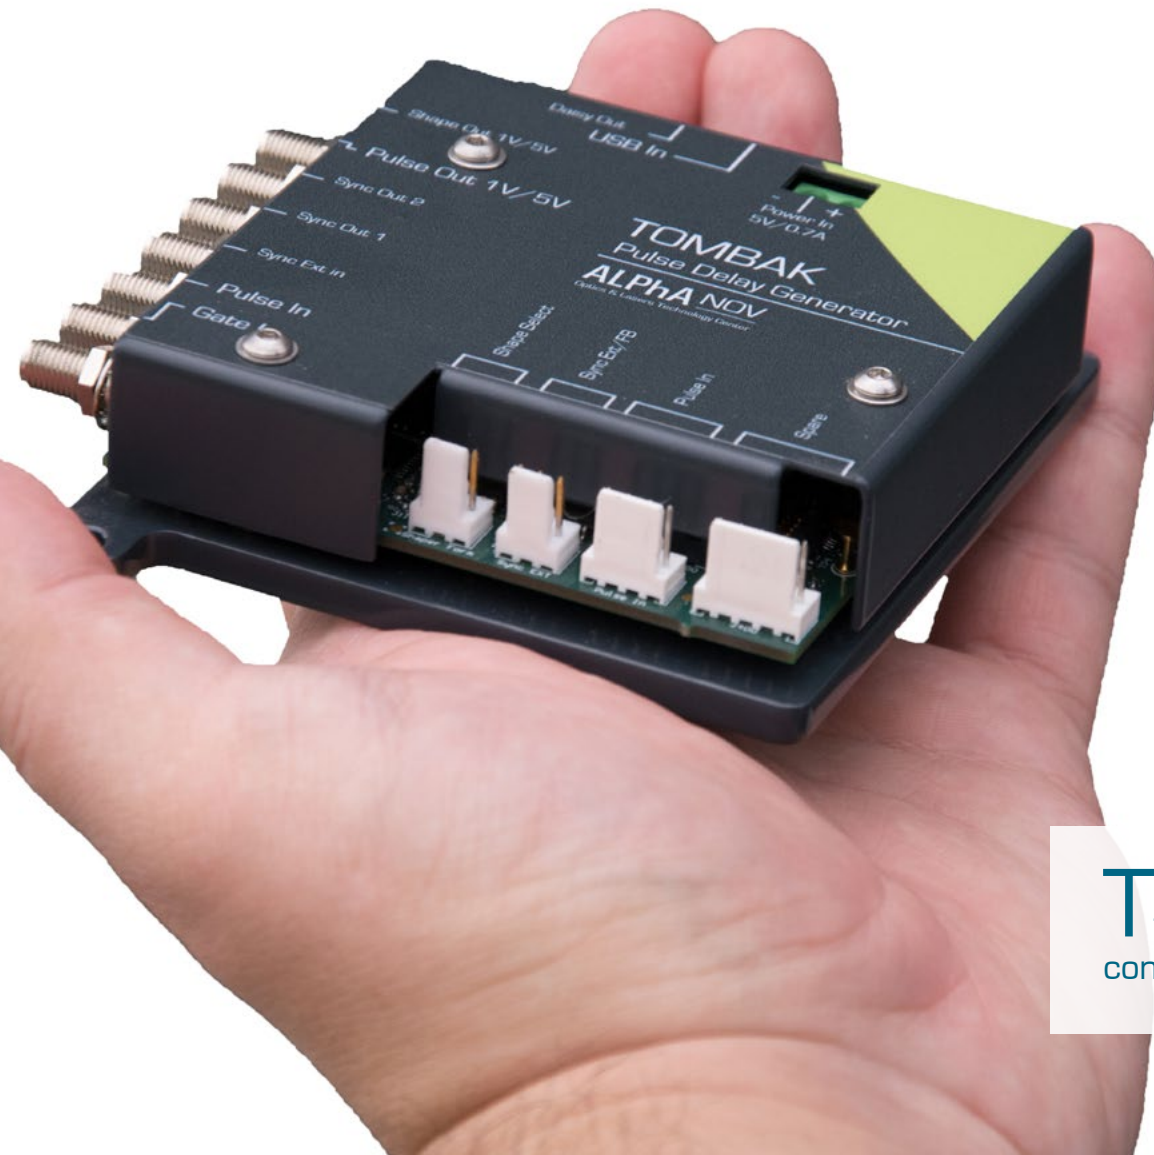

# PULSE DELAY GENERATOR

The Pulse Delay Generator is a great asset to generate high frequency pulses, delays and bursts. It's an ideal testing and timing control instrument for electronics and lasers.

## PULSE DELAY GENERATOR

### USE IT AS PULSE/DELAY GENERATOR:

- Adjustable pulse width: 5ns to 2<sup>62</sup>ns  
Adjustable pulse delay: 10ps to 2<sup>62</sup>ns  
Width resolution:
- 2ns for pulse width: 5 to 510 ns
  - 5ns for pulse width: 511ns to 2<sup>62</sup>ns

Delay resolution: 10ps



Jitter:

- <80ps RMS up to 100ns delay
- <200ps RMS up to 500ns delay
- 1.5ns RMS otherwise

### USE IT AS VOLTAGE LEVEL CONVERTER:

- Rate: up to 150MHz  
Input Voltage: 30mV to 3.3V  
Adjustable output level: 1V/3.3V/5V\_TTL  
<30ps Jitter

### GUI control software:

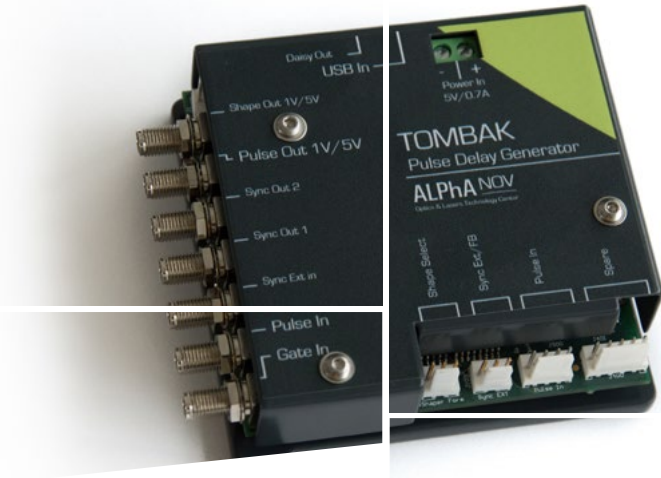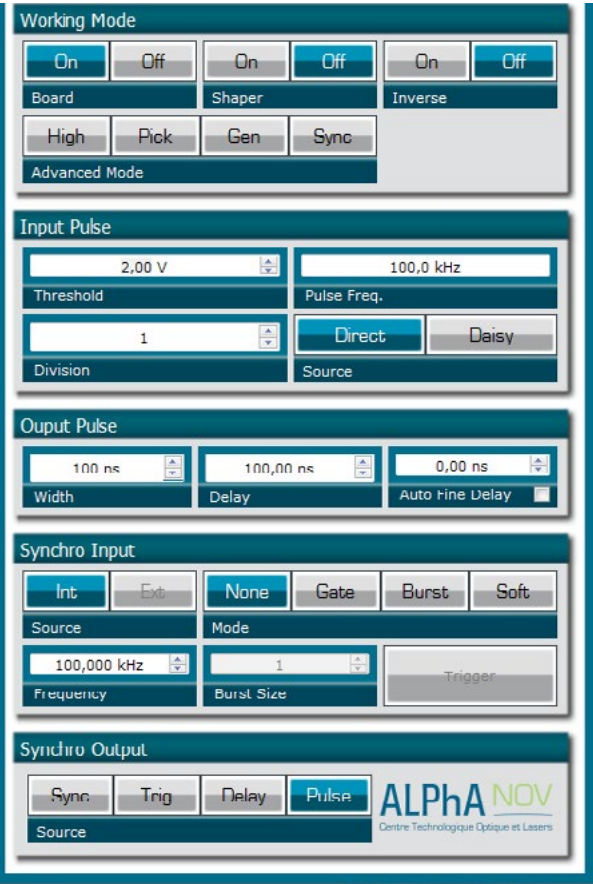

### Electrical:

Pulse_Out Outputs (SMA connector)	
Output Impedance	50 Ω recommended coupling
Adjustable output level	1 V/3.3 V/5 V_TTL
Rise time	<1 ns typical
Max output rate	20 MHz

Pulse_In (SMA connector)	
Input voltage	0 to 3.3 V
Threshold	0-3.3 VDC software adjustable (Pulse In)
Max Input rate	200 MHz
Insertion delay	70 ns

Sync Ext/Gate Inputs (SMA connector)	
Input voltage	0 to 3.3 V
Threshold	1.2 V
Max input rate	20 MHz

### General:

Power voltage/current	+5 VDC/500 mA (charger included)
USB 2.0 (cable included)	
Stackable units	Multiple channel setup using several units (single USB/single power supply/ single synchronization input signal)



# YOUR CONTACT

---

Ludovic LESCIEUX

Tél. : +33 (0)5 24 54 52 44

[ludovic.lescieux@alphanov.com](mailto:ludovic.lescieux@alphanov.com)

**[www.alphanov.com](http://www.alphanov.com)**

# ALPhA NOV

Optics & Lasers Technology Center

Institut d'optique d'Aquitaine

Rue François Mitterrand

33400 Talence - France



MINISTÈRE  
DE L'ENSEIGNEMENT SUPÉRIEUR,  
DE LA RECHERCHE  
ET DE L'INNOVATION



ISO 9001:2008  
BUREAU VERITAS  
Certification

